

DECLASSIFIED BY *[illegible]* AGENCY  
**CONFIDENTIAL**  
DECLASSIFIED BY *[illegible]* AGENCY

Instructions:

1. Original to be signed personally by recipient and returned to Office of Sender.
2. Duplicate to be retained by Addressee.
3. Caution - Avoid identifying documents in any manner which might necessitate classification of this receipt.

**RECEIVED**

**AUG 3 2001**

**LICENSING & REVIEW**

TO:

Director of the U.S. Patent and Trademark Office  
Washington, D.C. 20231

Attn: Licensing & Review Branch

FROM:

OLIFF & BERRIDGE, PLC  
P.O. Box 19928  
Alexandria, Virginia 22320

By:

*Ann M. Williams*  
Ann M. Williams

Date: August 3, 2001

Description of Attachments or Enclosures

Claim for Priority (U)  
Priority Document (12 pgs. - C); 3 pgs - U)

Serial No. 09/862,979 Attorney Docket No. 109433

The above-identified matter was personally received by me on the  
\_\_\_\_\_ day of \_\_\_\_\_, 2001.

Signature of Addressee or Authorized  
Representative

DECLASSIFIED BY *[illegible]* AGENCY  
**CONFIDENTIAL**  
DECLASSIFIED BY *[illegible]* AGENCY

Unclassified When  
Detached

Unclassified When  
Detached

DECLASSIFIED BY ORIGINAL AGENCY  
**CONFIDENTIAL**

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Clive E. OLIVE

Group Art Unit: 3642

Application No.: 09/862,979

Filed: May 21, 2001

Docket No.: 109433

For: SHROUDED NOZZLE ARRANGEMENT

CLAIM FOR PRIORITY

Director of the U.S. Patent and Trademark Office  
Washington, D.C. 20231

**RECEIVED**

AUG 3 2001

**LICENSING & REVIEW**

*4/ Priority  
Poyeev  
8/16/01  
Holmes*

Sir:

The benefit of the filing date of the following prior foreign application filed in the following foreign country is hereby requested for the above-identified patent application and the priority provided in 35 U.S.C. §119 is hereby claimed:

United Kingdom 0014359.4 filed June 14, 2000

In support of this claim, a certified copy of said original foreign application:

  x   is filed herewith.  
       was filed on        in Parent Application No.        filed       .  
       will be filed at a later date.

It is requested that the file of this application be marked to indicate that the requirements of 35 U.S.C. §119 have been fulfilled and that the Patent and Trademark Office kindly acknowledge receipt of this document.

Respectfully submitted,

*[Signature]*  
James A. Oliff  
Registration No. 27,075

Joel S. Armstrong  
Registration No. 36,430

JAO/JSA:amw

Date: August 3, 2001

OLIFF & BERRIDGE, PLC  
P.O. Box 19928  
Alexandria, Virginia 22320  
Telephone: (703) 836-6400

DECLASSIFIED BY ORIGINAL AGENCY  
**CONFIDENTIAL**  
DECLASSIFIED BY ORIGINAL AGENCY

DEPOSIT ACCOUNT USE  
AUTHORIZATION  
Please grant any extension  
necessary for entry;  
Charge any fee due to our  
Deposit Account No. 15-0461

Unclassified When  
Detached

Unclassified When  
Detached



The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I further certify that pursuant to Section 22(1) of the Patents Act, 1977, the Comptroller has ordered prohibition of publication of the said specification.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., P.L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

## CERTIFIED COPY OF PRIORITY DOCUMENT

Signed 

Dated 02 MAY 2001

An Executive Agency of the Department of Trade and Industry

THE PATENT OFFICE

- 5 JUN 2000

RECEIVED BY POST

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The  
Patent  
Office

1/77

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference	PAT/GPW/2786			14 JUN 2000 2544520-1 001097 00 0.00-0014359.4
2. Patent application number (The Patent Office will fill in this part)	<b>0014359.4</b>			<b>- 5 JUN 2000</b>
3. Full name, address and postcode of the or of each applicant (underline all surnames)	ROLLS-ROYCE plc 65 BUCKINGHAM GATE LONDON SW1E 6AT GREAT BRITAIN			
Patents ADP number (if you know it)				
If the applicant is a corporate body, give the country/state of its incorporation	GREAT BRITAIN			
4. Title of the invention	SHROUDED NOZZLE ARRANGEMENT			
5. Name of your agent (if you have one)	MR V J BIRD			
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	INTELLECTUAL PROPERTY DEPT EW 1-5 ROLLS-ROYCE plc PO BOX 3 FILTON BRISTOL BS34 7QE			
Patents ADP number (if you know it)				
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)	
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES			

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	5 ✓
Claim(s)	2 ✓
Abstract	1 ✓
Drawing(s)	4 + 4 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	NO
Request for preliminary examination and search (Patents Form 9/77)	NO
Request for substantive examination (Patents Form 10/77)	NO
Any other documents (please specify)	NO

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

1 JUNE 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

MR G P WALKER 0117 979 7416

#### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

### SHROUDED NOZZLE ARRANGEMENT

The present invention concerns a shrouded nozzle arrangement wherein a Low Observable Shrouded Exit Nozzle (LOSEN) is used to minimise the infra-red and radar signatures of a gas turbine engine exhaust.

Electromagnetic radiation, emitted or reflected by the gas turbine exit nozzle contributes significantly to the "signature" of a vehicle. By mounting the exit nozzle within a suitably shaped shroud this signature is reduced. Radar signals are absorbed or diffused by the shroud and infra-red emissions are masked, either by the shroud itself or by cool air ducted by the shroud to pass around the nozzle and the exhaust stream issuing from it. Such an arrangement, by its nature, defines a constraining envelope within which the nozzle must lie in order to be effective. This imposes constraints upon the use of reheat or thrust vectoring of the engine exhaust stream.

In a plane perpendicular to the engine centre line, the cross-sectional area of the shroud exit aperture is the same or only slightly larger than the exhaust stream in the same plane. As a consequence, the use of a thrust vectoring nozzle to direct the exhaust stream away from the engine centre line would inevitably cause hot exhaust gas to impinge upon the LOSEN shroud imposing impractical loads and temperatures. Similarly, a significant increase in exhaust gas temperature, caused by the use of reheat, would require significant cooling of the LOSEN shroud, imposing unacceptable performance penalties upon the engine.

The present invention seeks to provide an improved shrouded exit nozzle arrangement for a gas turbine engine that overcomes the limitations inherent in the existing design.

According to the present invention in its broadest aspect there is provided a shrouded nozzle arrangement for a gas turbine engine exhaust comprising an exhaust nozzle, a duct means for providing communication of exhaust gas between the gas turbine and exhaust nozzle, and a shroud which encloses the nozzle and duct means, the shroud

having an exit aperture through which, in use, the exhaust nozzle discharges, characterised in that the exhaust nozzle is translatable from a first position, wherein the exit plane of the nozzle lies upstream of the exit aperture of the shroud, to a second position, wherein the exit plane of the exhaust duct lies substantially downstream of the exit aperture of the shroud.

The invention will now be described in greater detail with particular reference to the embodiment illustrated, by way of example only, in the accompanying drawings in which:

Figure 1 shows a view of the rear of an aircraft equipped with a LOSEN arrangement;

Figure 2 shows a cross-section through the LOSEN arrangement in Figure 1 with the nozzle in the retracted position;

Figure 3 shows a more detailed view of section A of Figure 2; and

Figure 4 shows a cross-section through the LOSEN arrangement in Figure 1 with the nozzle in the extended position.

Referring now to the drawings, Figure 1 shows a view of the rear of an aircraft fitted with a LOSEN arrangement. A shroud 10 surrounds a nozzle 8 defining a shroud annulus 12 which is open at its downstream end.

In Figure 2 there is shown a cross section through the LOSEN arrangement of Figure 1. An annular duct means 2,4 provides communication between the exit of a reheat equipped gas turbine engine 6 and a thrust vectoring downstream nozzle 8. A shroud 10 surrounds the duct means 2,4 and the nozzle 8 defining a shroud annulus 12 within the shroud.

The duct means 2,4 comprises an annular inner duct member 2 attached at its upstream entrance to the turbine engine 6 exit and an annular outer duct member 4, attached at its downstream exit to the nozzle 8. The two duct members 2,4 are concentric and overlap such that an essentially continuous duct means is formed between engine 6 and nozzle 8. A gas tight seal is provided between the inner duct member 2 and outer duct member 4 by a ring 14.

The inner duct is fixed relative to the shroud 10. The outer duct member 4 is slideably mounted to a support barrel 16 which lies within the shroud 10 and surrounds the outer duct member 4. This support barrel 16 is attached to the shroud 10 and remains fixed relative to the shroud 20 and inner duct member 2.

Referring now to Figure 3, the support barrel 16 and the outer duct member 4 are radially spaced to form an annulus. This annulus is partitioned by annular first and second flanges 20,22 to create a chamber 18. The first flange 20 forms the upstream wall of the chamber 18 and is attached to the outer duct member 4, projecting outwards to slideably engage the support barrel 16 about its inner surface. The second flange 22 forms the downstream wall of the chamber 18 and is attached to the support barrel 16 projecting inwards to slideably engage the outer duct member 4 about its outer surface. Both flanges 20,22 utilise gas-tight rings 21,23 for their engagement means. Finally, a hole 24 in the outer duct member 4 provides communication between the chamber 18 and inside of the duct member 2,4.

Referring back to Figure 2, a pair of rails 26,28 lies either side of the chamber 18 and these are provided at a number of radial positions around the external surface of the outer duct member 4. The rails 26,28 run in concomitant bearings 30,32 which enable axial movement. The bearings 30,32 are retained by supports 34,36 fixed to the support barrel 16.

Three hydraulic ram actuators 38 are equi-spaced radially about the inside of the shroud 10, each fixed at a one end to the inner surface of the shroud 10. The opposite end of each actuator 38 is attached to a carriage 40 slideably mounted between the



inner surface of the shroud 10 and the outer surface of the support barrel 16. The carriage 40 is in turn attached to the outer duct member 4 by a linkage 42 passing through an axial slot in the support barrel 16, lying downstream of the chamber 18.

In normal operation, the actuators 38 are locked at their full extension. Via the carriage 40 and lever 42, the duct means 2,4 is reduced to its shortest length. The exit plane of the nozzle 10 is thus withdrawn into the shroud 10 and lies upstream of the exit aperture of said shroud 10.

In this configuration, radar signals are either diffused by the shroud 10 or absorbed by special coatings applied to it. At the same time, exhaust gas 44 issuing from the exit of the gas turbine engine 6 passes down the duct means 2,4 and through the nozzle 8. Secondary air 46, taken from the airflow outside the shroud is directed through the shroud annulus. This secondary air 46 is at a lower temperature and pressure than the exhaust gas 44 and so cools the duct means 2,4, nozzle 8 and shroud 10 thus reducing the infra-red signature as well as protecting any sensitive coatings applied to the shroud 10. The secondary air 44 is then directed by the shroud 10 exit aperture to form a sheath of cool air around the exhaust gas 44 leaving the nozzle 8. This covering of cool air masks the infra-red signature of the exhaust plume.

Referring now to Figure 4, when it is necessary to use reheat or operate the thrust vectoring nozzle 8, the actuators 38 are retreated to their shortest length. Via the carriage 40 and lever 42, the duct means 2,4 is extended to its fullest length. The exit plane of the nozzle 10, attached to the downstream end of the outer duct member 4 is thus projected substantially beyond the exit aperture of the shroud 10. This facilitates the use of reheat or thrust vectoring. Reheat is possible as the superheated exhaust gas 44 leaves the nozzle 8 aft of the shroud 10 and is not able to impinge upon the shroud 10. Likewise, the use of thrust vectoring does not result in hot exhaust gas 44 impinging upon the shroud 10. Whilst the invention remains in this configuration, the shroud will be ineffective at reducing the signature of the exit nozzle 8 or its efflux, however, reheat and thrust vectoring are unlikely to be used at times when the aircraft's signature is important.

Referring again to Figure 3, it will be seen that during operation, the pressure within the chamber 16 is higher than that either side of the flanges 20,22. The pressure within the chamber is that of the exhaust gas 44 issuing from the engine 6 but the opposite side of each flange is in communication with the secondary air 46 at a lower pressure than the exhaust gas 44. As a result, the pressure acting upon the first flange 20 creates an axial force acting in the upstream direction, offsetting the axial loads in the downstream direction imposed by exhaust gas 44 acting upon the nozzle. This serves to minimise the work required by the actuators 38 to move or restrain the outer duct member 4 and nozzle 8.

In the embodiment of the invention shown, the duct members 2,4 are arranged with the inner duct member 2 fixed and located upstream of the outer duct member 4 which is slideably mounted. Alternatively, the outer duct member may be fixed and located upstream of a slideably mounted inner duct member.

The actuation system described for this embodiment comprises actuators 38 rigidly fixed at one end to the shroud 10 and operating the slideable duct member 4 via a carriage 40 and linkage 42. Alternatively, the actuators may be pivoted at their attachment point on the shroud such that the carriage 38 and linkage are not necessary. It will also be understood that the number of actuators 38 need not be strictly limited to three although this does seem to be the minimum to guarantee the slideable duct 4 member does not rock when operated.

Finally, although the embodiment of the invention features both thrust vectoring and reheat, the invention itself is equally applicable where only thrust vectoring or only reheat is required.

## CLAIMS

- 1 A shrouded nozzle arrangement for a gas turbine engine exhaust comprising an exhaust nozzle, a duct means for providing communication of exhaust gas between the gas turbine and exhaust nozzle, and a shroud which encloses the nozzle and duct means, the shroud having an exit aperture through which, in use, the exhaust nozzle discharges, characterised in that the exhaust nozzle is translatable from a first position, wherein the exit plane of the nozzle lies upstream of the exit aperture of the shroud, to a second position, wherein the exit plane of the exhaust duct lies substantially downstream of the exit aperture of the shroud.
- 2 A shrouded nozzle arrangement as claimed in claim 1 wherein the duct means comprises an inner duct member and an outer duct member concentric with one another, wherein the inner and outer duct members are slideably mounted and movable relative to one another, the outer duct member at all times overlapping the inner duct member such that inner and outer duct members provide continuous duct means.
- 3 A shrouded nozzle arrangement as claimed in claim 2 wherein a substantially annular support means is provided, the support means remaining fixed relative to one of the duct members, the other duct member being slideably mounted within the support means and moving relative to the support means.
- 4 A shrouded nozzle arrangement as claimed in claim 3 wherein the support means is provided with an inwardly projecting first flange, the first flange slideably engaging the slideable duct member about an annular periphery to provide a substantially gas tight seal, the slideable duct member provided with an outwardly projecting second flange, the second flange slideably engaging the support means about an annular periphery to provide a substantially gas tight seal, the first and second flanges defining a chamber between support means

and slideable duct member into which exhaust gas may be bled from within the duct means, the first and second flanges being disposed such that pressure within the chamber acts upon the slideable duct member to counter the loads imposed by exhaust gas impinging upon the exit nozzle.

- 5 A shrouded nozzle arrangement as claimed in any of claims 1 to 4 wherein a reheat system is provided within the duct means.
- 6 A shrouded nozzle arrangement as claimed in any of claims 1 to 4 wherein the nozzle is capable of thrust vectoring.
- 7 A shrouded nozzle arrangement as claimed in any of claims 1 to 6 wherein the shroud is configured to minimise the radar and infra-red signatures of the nozzle and exhaust gas issuing from the nozzle.


**ABSTRACT**

**SHROUDED NOZZLE ARRANGEMENT**

A shrouded nozzle arrangement for a gas turbine engine exhaust comprises a shrouded nozzle and duct means. The exhaust nozzle is translatable from a first position, wherein the exit plane of the nozzle lies upstream of the exit aperture of the shroud, to a second position, wherein the exit plane of the exhaust duct lies substantially downstream of the exit aperture of the shroud. In this second position, the use of reheat or thrust vectoring may be used without damage to the shroud.

FIGURE 1.

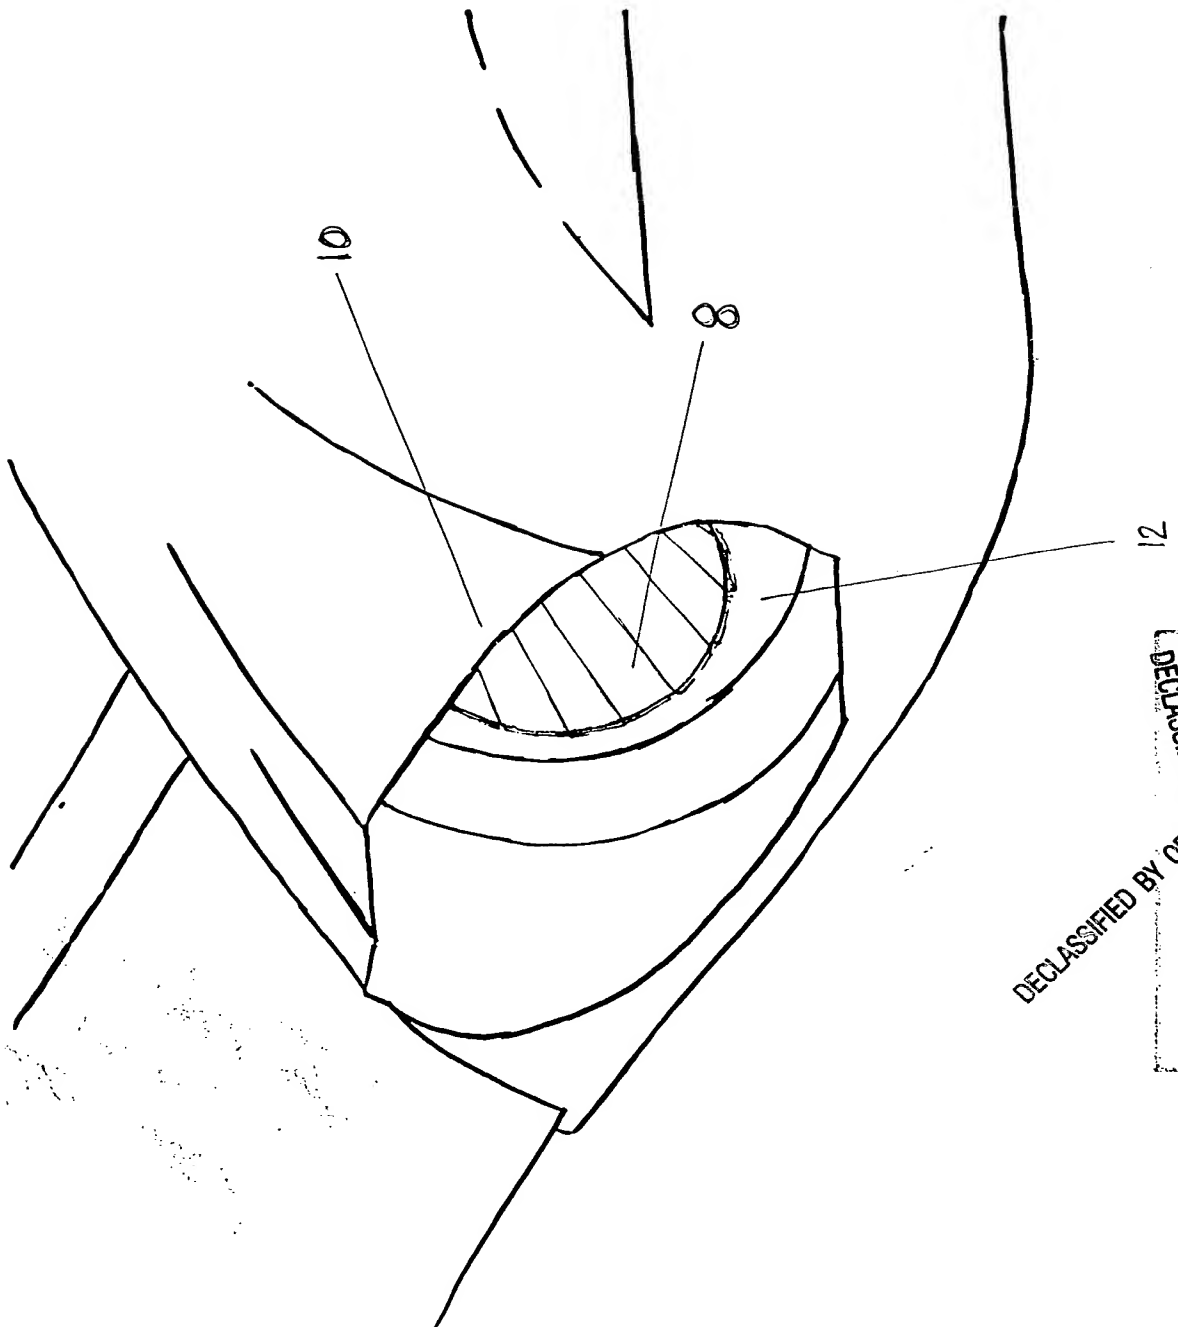
DECLASSIFIED BY **RESTRICTED**  
DATE **10/10/00**



DECLASSIFIED BY **ORIGINATING AGENCY**  
DATE **10/10/00**

DECLASSIFIED  
BY THE STRIPPING AGENCY  
WC EYES

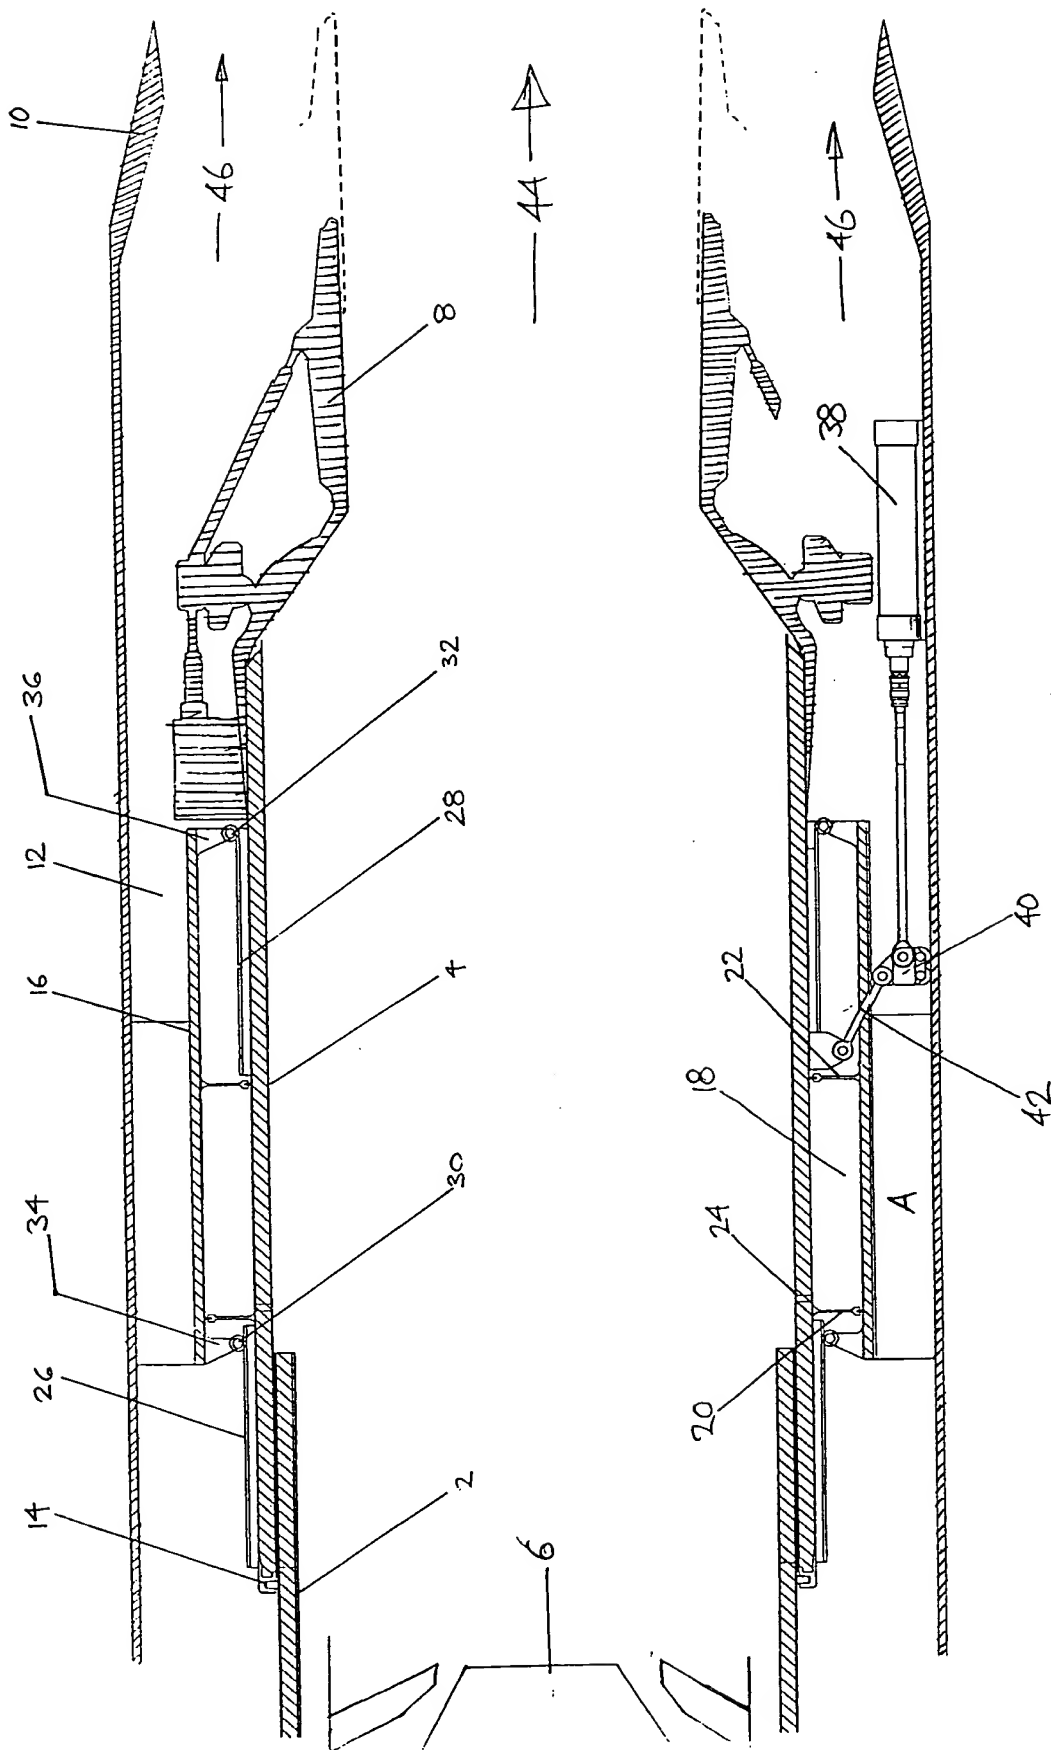Figure 2



DECLASSIFIED BY THE STRIPPING AGENCY  
WC EYES

DECLASSIFIED BY **RESTRICTED AGENCY**  
WC EYES 2

4

22

23

18

24

20

2-1

16

DECLASSIFIED BY **RESTRICTED AGENCY**  
WC EYES 2

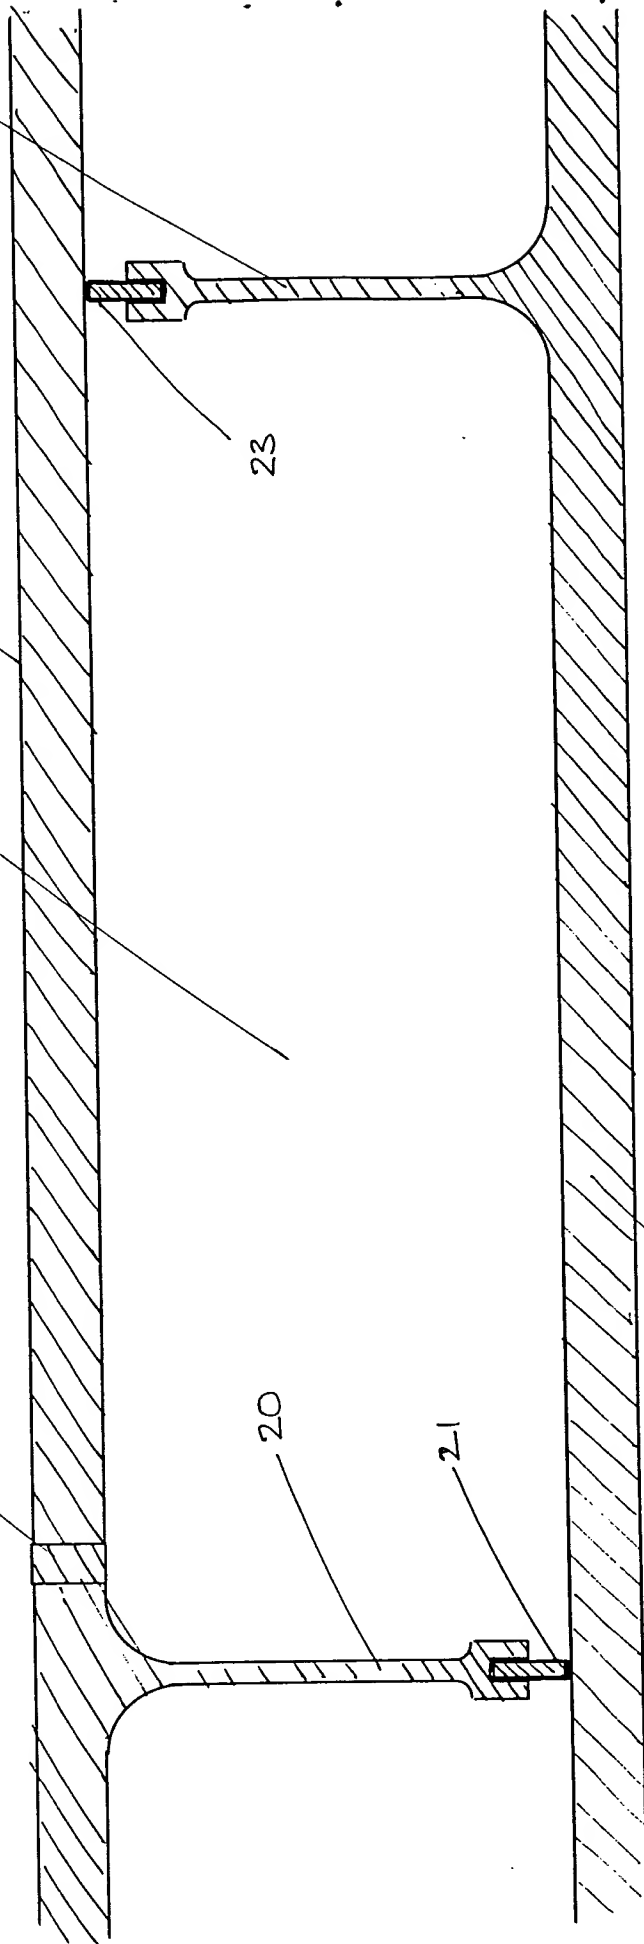
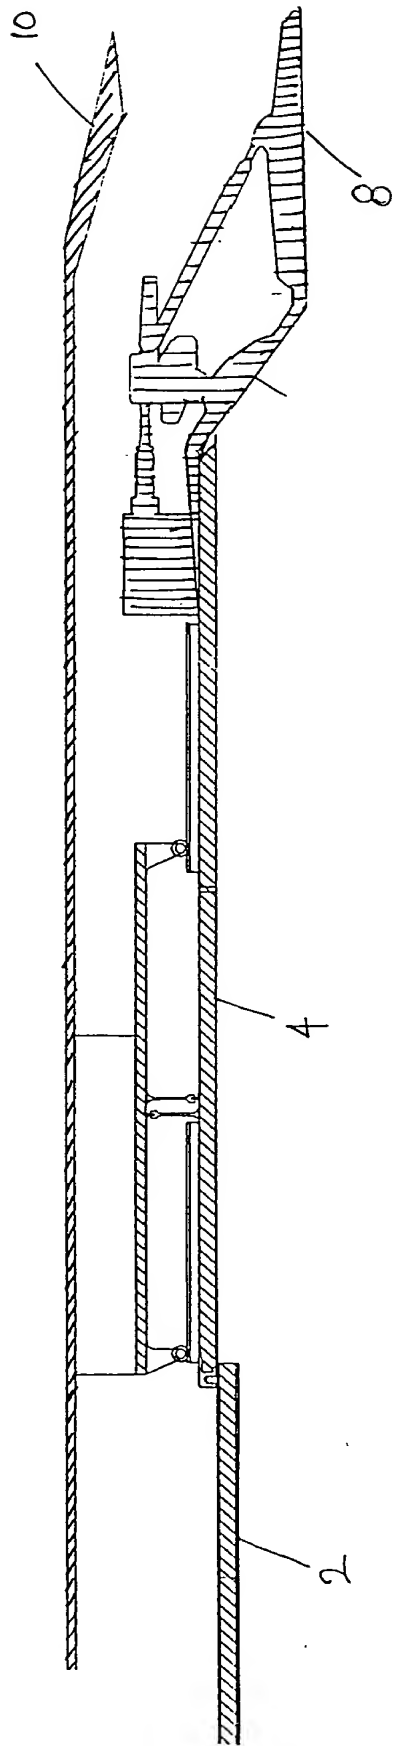


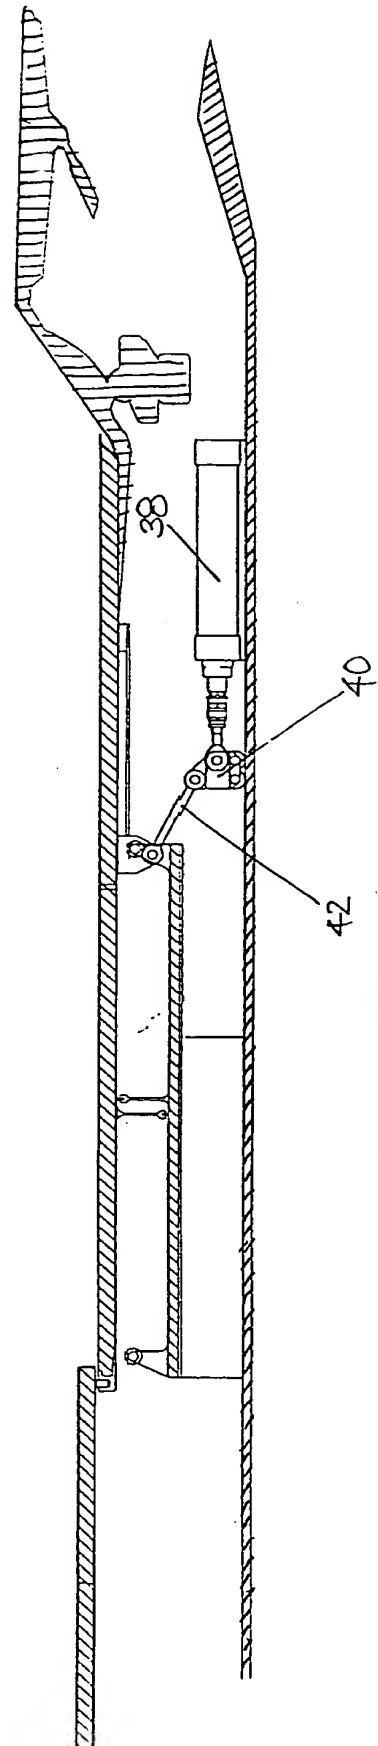


FIGURE 4

DECLASSIFIED BY 6852 JAW  
WC EYES



44



DECLASSIFIED BY 6852 JAW  
WC EYES